


DS-2CE55C2P(N)


720 TVL PICADIS Indoor Dome Camera

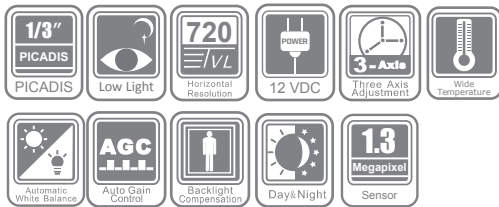

Key features

- 1/3" PICADIS
- 1.3MP Sensor: 1280 (H) x 960 (V) Effective Pixels
- 720 TVL Horizontal Resolution
- Electronic Day/Night
- 2.8/3.6/6mm Fixed Lens, 0.1 lux /F1.2
- High dynamic range
- Superior video image output and ultra low light illumination
- Wide operating temperature range

Dimensions

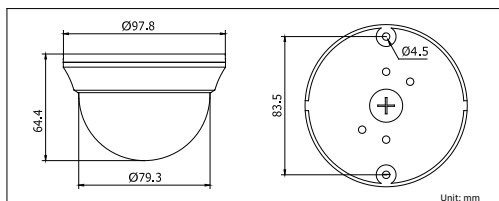

DS-2CE55C2P(N)	
Camera	
Image Sensor	1/3" PICADIS
Signal System	PAL/NTSC
Effective Pixels	1280 (H) x 960 (V)
Min. Illumination	0.1 Lux @ (F1.2,AGC ON)
Shutter speed	PAL: 1/25 s to 1/25,000 s NTSC: 1/30 s to 1/30,000 s
Lens	3.6 mm (2.8mm,6 mm optional) Angle of view: 71.4° (3.6 mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 355°, Tilt: 0 - 90°, Rotation: 0 - 355°
Day & Night	Electronic
Horizontal Resolution	720 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
General	
Working Temperature/ Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 V DC
Power Consumption	Max. 1W
Dimensions	Φ 97.8 x 64.4 mm (φ 3.85" x 2.54")
Weight	300 g (0.66 lbs)

Available models

PAL: DS-2CE55C2P
NTSC : DS-2CE55C2N